


- Notes:
- 1.Type:Film to Film
  - 2.Operating Voltage:≤10V
  - 3.Operating Temperature:-20℃~65℃  
Storage Temperature:-30℃~70℃
  - 4.Life Time:1,000,000 times
  - 5.Connect Material:FPC
  - 6.Response Time:≤10ms
  - 7.Linearity:≤1.5%
  - 8.Transmittance:≥75%
  - 9.Surface Hardness≥3H(pencil)
  - 10.Operation force:60g~150g
  - 11.Resistance:X:360Ω-880Ω Y:200Ω-500Ω

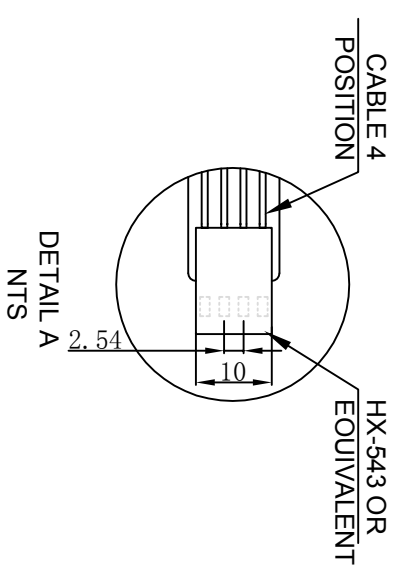

TOLERANCES  
(UNLESS OTHERWISE STATED)  
DECIMALS ANGLES ±0.5%

>2000MM	±2.00MM
1600< X ≤2000MM	±1.20MM
1200< X ≤1600MM	±0.80MM
800< X ≤1200MM	±0.50MM
400< X ≤800MM	±0.40MM
120< X ≤400MM	±0.30MM
30< X ≤120MM	±0.20MM
<30MM	±0.10MM

GreenTouch

GreenTouch Technology Co., Ltd

Model No.:	GT-AW-15A-F	Size	15"	Ratio	4:3
Structure	F+F	Unit	mm	Scale	1:1
Design	李俊	Date	2020.02.25	Page	1/1
Check	符作非	Date	2020.02.25	Version	A0
Release	符作非	Date	2020.02.25		