



1	2	3	6	7	8
File No:			版本	Amend Record	
			V1.0	First Version.	
			Charger	Date	


Front 1:1

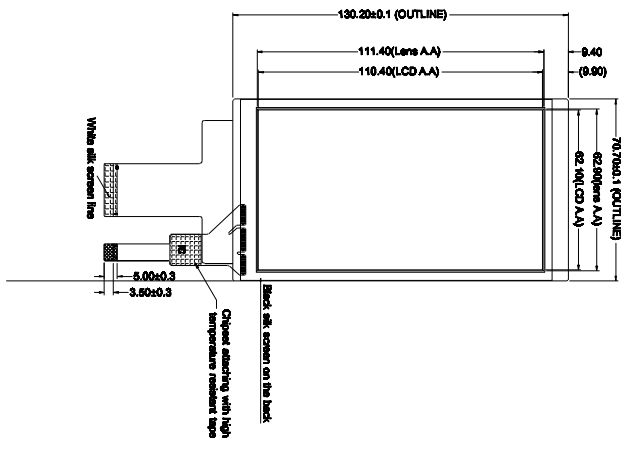

Side 10:1

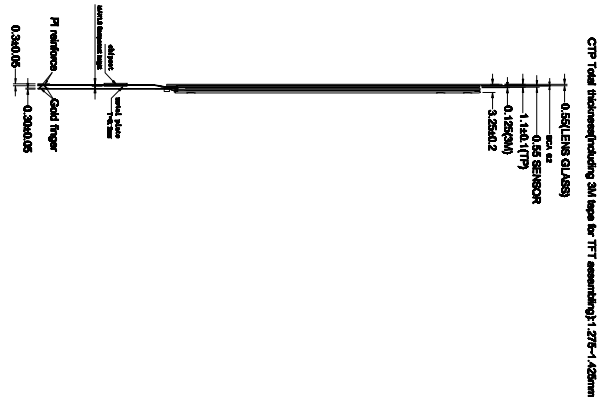

Back 1:1

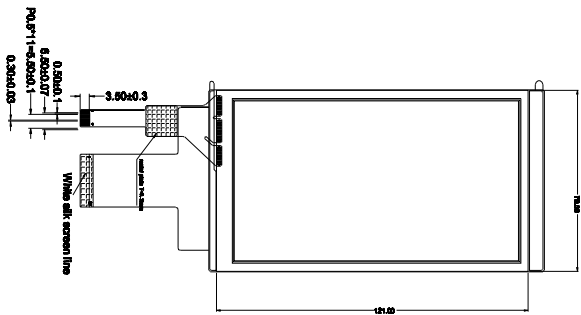

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

Technical Parameters:

- 1.IC: FT911 12*20
- Cover GLASS:0.55mm
- SCA:0.200mm
- ITO SENSOR: 0.55
- Lead: FPC (PINCH=0.5mm)
- Total thickness: 1.3±0.1mm
- 2.Operating Voltage: 2.8V IO Voltage:
- 3. Transparency: ≥83%
- 4. Tolerance: 6H
- 5. Working environment: -20℃~+50℃, ≤90%RH
- 6. Storage environment: -30℃~+60℃, ≤90%RH

Explanation:

1. structure type: G+G Structure.
2. Tolerance : ±0.20;
3. Products are RoHS compliant;

<p>GreenTouch</p> <p>GreenTouch Technology Co.,Ltd</p>		DRAWN BY: 廖 刚 CHECKED BY: 廖 刚 APPROVED BY: 廖 刚 DATE: 2014-05-05 Standard tolerance: 公 差:	PRODUCT MODEL: GT-CT950028 CLIENT ORDER ID: 客户编号: DATE: 日期: WEBSITE: 网址:	VIEW: 投影方式: 第三角投影法 UNITS: 单位: mm SCALE: 比例: 1:1
		<p>客户确认签字:</p>		