

由 Autodesk 教育版产品制作

6

7

8



版本	Amend Record	Charger	Date
V1.0	First Version.		

File No:

Front 1:1

Side 10:1

Back 1:1

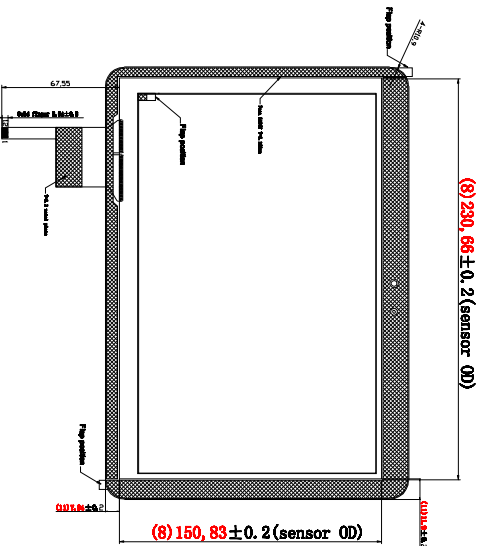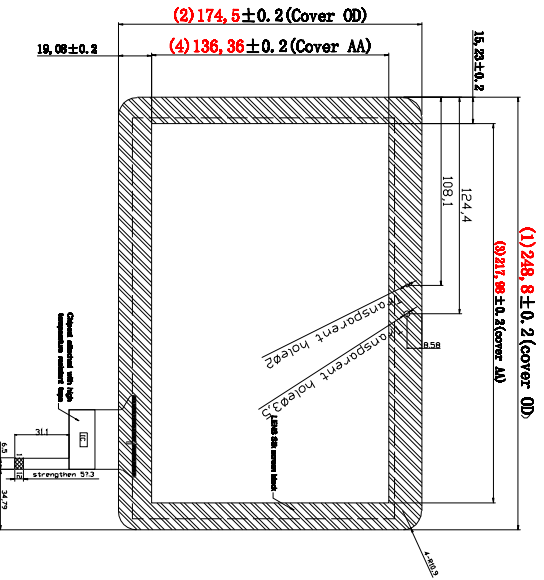

- Tech Specs:
- Tech Specs: ITO GLASS:0.55mm cover GLASS:0.7mm Adhesive:0.165mm IC:GT928(RX20-TX30)
  - Working Volt: 2.8V-3.3V
  - Transparency: ≥87%
  - Surface Hardness: ≥7H
  - Workingenvironment: -10°C~+60°C, ≦90%RH
  - Storage environment: -20°C~+70°C, ≦90%RH
  - Tolerance: ±0.20mm
  - Standard ( ) is the key control size, Standard \* is CPK control size.
  - Products are RoHS compliant.

PIN	Logic
1	GND
2	NC
3	NC
4	NC
5	NC
6	GND
7	SDA
8	SCL
9	RSET
10	INT
11	VDD/3.3V
12	VDD/3.3V

客户确认签字:

DRAWN BY:	陈政焜	PRODUCT MODEL:	GT-C7P10011	VIEW:	第三角投影法
检查:		产品型号:		UNIT:	mm
审核:		客户编号:		SCALE:	1:1
批准:		日期:		UNIT:	mm
标准:		网站:		SCALE:	1:1
公司:		网址:		UNIT:	mm

GreenTouch Technology Co., Ltd

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

6

7

8